



Legal Document

USPTO Patent Trial and Appeal Board

Case No. IPR2014-00564

Chrysler Group LLC v. Norman IP Holdings, LLC

Document 36



View Document



View Docket

UNITED STATES PATENT AND TRADEMARK OFFICE

BEFORE THE PATENT TRIAL AND APPEAL BOARD

NISSAN NORTH AMERICA, INC.,
Petitioner,

v.

NORMAN IP HOLDINGS, LLC,
Patent Owner.

Case IPR2014-00564
Patent 5,530,597

Before BRYAN F. MOORE, HYUNG J. JUNG, and
FRANCES L. IPPOLITO, *Administrative Patent Judges*.

IPPOLITO, *Administrative Patent Judge*.

FINAL WRITTEN DECISION
Inter Partes Review
35 U.S.C. § 318(a) and 37 C.F.R. § 42.73

I. INTRODUCTION

Nissan North America, Inc. (“Petitioner”) filed a Petition on April 1, 2014, requesting an *inter partes* review of claims 6–9 of U.S. Patent No. 5,530,597 (“the ’597 patent”). (Paper 1, “Pet.”) Patent Owner, Norman IP Holdings, LLC, waived the Preliminary Response to the Petition. Paper 7. On September 23, 2014, we instituted an *inter partes* review of claims 6–9 on the following grounds of unpatentability alleged in the Petition:

- A. Claims 6–9 as unpatentable under 35 U.S.C. § 103 over Tokiwa¹ and Smith;²
- B. Claims 6–9 as unpatentable under 35 U.S.C. § 103 over Katayose³ and Smith; and
- C. Claims 6 and 7 as unpatentable under 35 U.S.C. § 102(b) over Smith.

Paper 18 (“Dec.”), 21.

After institution of trial, Patent Owner filed a Patent Owner Response (Paper 24, “PO Resp.”) and Petitioner filed a Reply thereto (Paper 27, “Pet. Reply”). Additionally, Patent Owner filed a Motion to Exclude certain evidence (Paper 29, “Mot. Excl.”), which Petitioner opposes (Paper 33, “Opp.”). In response to Petitioner’s Opposition, Patent Owner filed a Reply to Petitioner’s Opposition (Paper 34, “PO Reply to Mot. Excl.”).

An oral argument was held on June 1, 2015. The transcript of the oral hearing has been entered into the record. Paper 35 (“Tr.”).

¹ Japanese Pub. S61-39135, published Feb. 25, 1986 (“Tokiwa”) (Ex. 1002).

² U.S. Patent No. 4,748,559, issued May 31, 1988 (“Smith”) (Ex. 1004).

³ U.S. Patent No. 4,930,068, issued May 29, 1990 (“Katayose”) (Ex. 1003).

We have jurisdiction under 35 U.S.C. § 6(c). This Final Written Decision is issued pursuant to 35 U.S.C. § 318(a) and 37 C.F.R. § 42.73.

Petitioner has shown, by a preponderance of the evidence, that claims 6–9 of the ’597 patent are unpatentable.

A. Related Proceedings

Claims 1–6, 10, and 11 of the ’597 patent were the subject of *Ex Parte* Reexamination No. 90/012,781, filed on February 4, 2013. Ex. 1010, 2, 5. This reexamination resulted in *Ex Parte* Reexamination 5,530,597 Certificate C1, issued April 17, 2014 (“’597 C1”), indicating that claims 1–5, 10, and 11 were cancelled, the patentability of claim 6 was confirmed, and claims 7–9 were not reexamined. Ex. 3001.

Claims 1–6, 10, and 11 of the ’597 patent were also the subject of a request for a second *Ex Parte* Reexamination No. 90/012,901, filed by third party requestor ARM, Inc. on June 27, 2013. That request was denied on August 27, 2013. Ex. 1010, 3–4. Third party requestor ARM, Inc. filed a Petition for review of the denial on September 25, 2013. On April 23, 2014, ARM, Inc.’s Petition for review was dismissed as moot in view of the ’597 C1 certificate. Ex. 3002.

For other related proceedings, Petitioner provides a list of related matters in various federal district courts. Pet. 2–5.

B. The ’597 Patent

The ’597 patent describes interrupt controllers with interrupts that may be masked by software. Ex. 1001, 1:54–56. More particularly, the ’597 patent describes an interrupt enable circuit “capable of allowing an interrupt to be enabled and disabled by software at any time except under conditions, dictated by hardware, at which time the interrupt becomes non-maskable.” *Id.* at 3:9–12. Figure 2 of the ’597 patent is reproduced below.

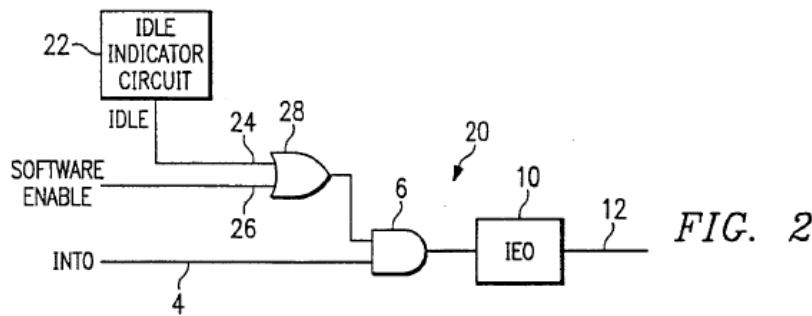


Figure 2 depicts an interrupt enable circuit that provides a maskable interrupt that becomes a “non-maskable interrupt while the processor is in the idle mode.” *Id.* at 5:51–52. Generally, when the SOFTWARE ENABLE signal is high, the interrupt request signal, INTO, will generate an interrupt. *Id.* at 5:21–23. When the SOFTWARE ENABLE signal is low, the interrupt is masked. *Id.* at 5:24–25. However, IDLE INDICATOR CIRCUIT 22 provides an IDLE signal on line 24 while the processor is in idle mode. *Id.* at 5:54–56. The IDLE signal is received with the SOFTWARE ENABLE signal by OR gate 28. *Id.* at 5:56–57. Thus, when the processor is in an idle mode, IDLE INDICATOR CIRCUIT 22 will assert an IDLE signal and cause the output of OR gate 28 to go high regardless of the state of the SOFTWARE ENABLE signal on line 26. *Id.* at 5:61–65. “As long as the OR gate output 28 remains at a high level . . . [the] INTO [signal] on line 4 will set latch 10, thus generating the interrupt.” *Id.* at 5:65–6:1. When the processor is not in the idle mode, the IDLE signal on line 24 remains low, and the enabling and disabling of the interrupt will be determined by the SOFTWARE ENABLE signal on line 26. *Id.* at 6:7–10.

C. Illustrative Claim

Challenged claims 6–9 depend directly or indirectly from claims 1, 4, and/or 5, which were cancelled by the *Ex Parte* Reexamination No.

90/012,781. Illustrative claim 6 and cancelled claims 1, 4, and 5 are reproduced below:

1. (Cancelled) An interrupt mask disable circuit comprising:
first logic circuitry operably coupled to receive an interrupt request and a mask signal and to provide an interrupt signal when the interrupt request is active and the mask signal is disabled, and to provide a non-interrupt signal when the mask signal is enabled regardless of whether the interrupt request is active or inactive; and
second logic circuitry operably coupled to receive a mask activation signal and a mask override signal and to produce the mask signal, wherein the mask signal is enabled when the mask activation signal is active and the mask override signal is not enabled and wherein the mask signal is disabled when the mask override signal is active regardless of whether the mask activation signal is enabled or disabled.
4. (Cancelled) The interrupt mask disable circuit of claim 1, wherein the mask override signal is enabled based on a hardware condition.
5. (Cancelled) The interrupt mask disable circuit of claim 4, further comprises being incorporated within a processor, and wherein the hardware condition occurs when said processor is in a particular state.
6. An apparatus as recited in claim 5 wherein said particular state comprises an idle mode.

II. ANALYSIS

A. Claim Construction

The '597 patent has expired. *See* Pet. 8. The Board's review of the claims of an expired patent is similar to that of a district court's review. *In re Rambus Inc.*, 694 F.3d 42, 46 (Fed. Cir. 2012). We are, therefore, guided by the principle that the words of a claim "are generally given their ordinary and customary meaning" as understood by a person of ordinary skill in the

art in question at the time of the invention. *Phillips v. AWH Corp.*, 415 F.3d 1303, 1312–13 (Fed. Cir. 2005) (en banc) (internal citation omitted).

1. “*first logic circuitry*” and “*second logic circuitry*” (claims 6–9)

Although the parties do not expressly propose a construction for any claim term (Pet. 7–8; PO Resp. 8; Tr. 37:18–38:25), the parties nonetheless dispute whether the terms “first logic circuitry” and “second logic circuitry” of the “interrupt mask disable circuit” required by claims 6–9,⁴ exclude an AND gate and an OR gate respectively (Tr. 37:23–38:8; 45:24–48:7)⁵.

Specifically, Patent Owner asserts that an AND gate alone does not satisfy the limitations of a “first logic circuitry” and an OR gate alone does not meet the limitations of a “second logic circuitry.” *Id.* at 37:23–38:8. According to Patent Owner, independent claim 1 excludes the embodiment disclosed in Figure 2 of the ’597 patent, and, thus, claims 6–9, which depend from claim 1, do not cover AND gate 6 (Fig. 2) as a “first logic circuitry” and OR gate 28 (Fig. 2) as a “second logic circuitry.” Tr. 38:11–42:1.

Petitioner disagrees with Patent Owner’s reading of “first logic circuitry” and “second logic circuitry” as excluding the embodiment shown in Figure 2 of the ’597 patent. Tr. 45:24–48:7. For the “second logic circuitry,” Petitioner asserts that excluding an OR gate alone would ignore the literal language of claim 8, which directly depends from claim 1 and recites that the “second logic circuitry comprises an OR gate.” Tr. 46:7–47:11. Similarly, Petitioner asserts that excluding an AND gate alone from

⁴ The terms “first logic circuitry” and “second logic circuitry” are recited in cancelled claim 1 from which challenged claims 6–9 depend.

⁵ We note that, as explained below in Section III, Patent Owner improperly included these arguments only in a Motion to Exclude. However, even if we consider those arguments we are not persuaded by them.

meeting the “first logic circuitry” would contradict the express language of dependent claim 9, which recites “the first logic circuitry comprises an AND gate.” *Id.*

To start, we note that a general principle of claim construction counsels against interpreting claim terms in a way that excludes embodiments disclosed in the specification. *Oatey Co. v. IPS Corp.*, 514 F.3d 1271, 1276–77 (Fed. Cir. 2008) (“We normally do not interpret claim terms in a way that excludes embodiments disclosed in the specification”); *see e.g., Verizon Servs. Corp. v. Vonage Holdings Corp.*, 503 F.3d 1295, 1305 (Fed. Cir. 2007) (rejecting proposed claim interpretation that would exclude disclosed examples in the specification); *Invitrogen Corp. v. Biocrest Mfg., L.P.*, 327 F.3d 1364, 1369 (Fed. Cir. 2003) (finding district court’s claim construction erroneously excluded an embodiment described in an example in the specification, where the prosecution history showed no such disavowal of claim scope); *NeoMagic Corp. v. Trident Microsystems, Inc.*, 287 F.3d 1062, 1074 (Fed. Cir. 2002) (“It is elementary that a claim construction that excludes the preferred embodiment ‘is rarely, if ever correct and would require highly persuasive evidentiary support.’”) (quoting *Vitronics Corp. v. Conceptronic, Inc.*, 90 F.3d 1576, 1583 (Fed. Cir. 1996)).

Here, Patent Owner’s construction of “first logic circuitry” and “second logic circuitry” would exclude most, if not all, of the embodiments disclosed in the ’597 patent. Generally, a construction that excludes all disclosed embodiments is especially disfavored. *Kaneka Corp. v. Xiamen Kingdomway Group Company*, Nos. 2014-1373, 2014-1399, 2015 WL 3613644, at *4 (Fed. Cir. Jun 10, 2015). For example, claim 6 depends from cancelled claim 1 and includes the “first logic circuitry” and “second logic

circuitry” recited in Claim 1. Claim 6 further depends from cancelled claims 4 and 5, and requires that the mask override signal (of the second logic circuitry) is enabled based on a hardware condition that occurs when a processor is in an idle mode. In describing the idle mode operation, the ’597 patent refers to IDLE INDICATOR CIRCUIT 22 in the circuitry of three embodiments depicted in Figures 2, 3, and 4. Ex. 1001, 5:53–56, 6:33–55. In each of Figures 2, 3, and 4, the ’597 patent shows that a single OR gate, OR gate 28 alone, receives SOFTWARE ENABLE signal 26 (e.g., mask activation signal) and IDLE signal 24/EXTERNAL SIGNAL 32 (e.g., “mask override signal”). OR gate 28 also generates a signal (e.g., mask signal) that is input into a single AND gate, AND gate 6. Ex. 1001, 5:61–65. The ’597 patent also shows AND gate 6 alone receives INTO signal 4 (e.g., interrupt request) and outputs a signal to interrupt flag IE0 10. *Id.* at Figs. 2–4. Thus, we do not agree with Patent Owner that the embodiments shown in Figure 2–4 exclude an OR gate alone (e.g., OR gate 28) from a “second logic circuitry” and an AND gate alone (e.g., AND gate 6) from a “first logic circuitry.”


Additionally, Figures 5a, 5b, 6, and 7 incorporate the circuitry shown in Figure 2. Ex. 1001, 6:64–7:2 (“FIG. 5 shows a block diagram of an integrated circuit . . . having the interrupt enable circuit shown in FIG. 2”), 7:28–30 (“FIGS. 6 and 7 describe[] how the IC of FIG. 5 may be incorporated into the handset unit and base unit [of] a cordless telephone.”). Thus, the embodiments described in Figures 5a, 5b, 6, and 7 also include AND gate 6 alone as a first logic circuitry and OR gate 28 alone as a second logic circuitry. Further, remaining Figure 1 of the ’597 describes the prior art, not an embodiment of a disclosed invention in the ’597 patent. *Id.* at 4:3.

Additionally, Patent Owner argues that claim 1 should be interpreted to exclude embodiments of the patented invention where those embodiments are clearly disclaimed in the specification. Tr. 39:5–16; *see North Am. Container, Inc. v. Plastipak Packaging, Inc.*, 415 F.3d 1335, 1345–46 (Fed. Cir. 2005) (excluding from claim scope certain embodiments in the drawings based on disclaimer during prosecution); *see also SciMed Life Sys., Inc. v. Advanced Cardiovascular Sys., Inc.*, 242 F.3d 1337, 1344 (Fed.Cir.2001) (excluding subject matter from claim scope based on clear disclaimer in the specification), or prosecution history. However, such a construction requires “highly persuasive evidentiary support.” *Adams Respiratory Therapeutics, Inc. v. Perrigo Co.*, 616 F.3d 1283, 1290 (Fed. Cir. 2010) (quoting *Vitronics Corp. v. Conceptronic, Inc.*, 90 F.3d 1576, 1583–84 (Fed. Cir. 1996)).

Based on the complete record before us, Patent Owner has not provided persuasive evidentiary support for its construction. Patent Owner contends that the signals shown in Figure 2 of the ’597 patent do not correspond to the logical relationship required by claim 1. *See* Tr. 41:8–42:1. Referring to Figure 2, Patent Owner argues that element 4 is an interrupt request signal and the output signal from gate 28 is a mask signal. According to Patent Owner, “the interrupt signal and the interrupt request signal are both on when the mask gate is off. And that is impossible when you have an AND gate. An AND gate requires that both inputs to be on for the output to be on.” *Id.* at 41:22–25. In response, Petitioner agrees that INT0 line 4 is an “interrupt request” and the output of OR gate 28 is a mask signal. Tr. 47:17–48:7.

Looking to the Specification, we do not agree with Patent Owner that the Specification disclaims or excludes Figure 2 from the scope of the “first logic circuitry” and “second logic circuitry” limitations recited in claim 1

and required in claim 6. For convenience, Figure 2 of the '597 patent is reproduced below.

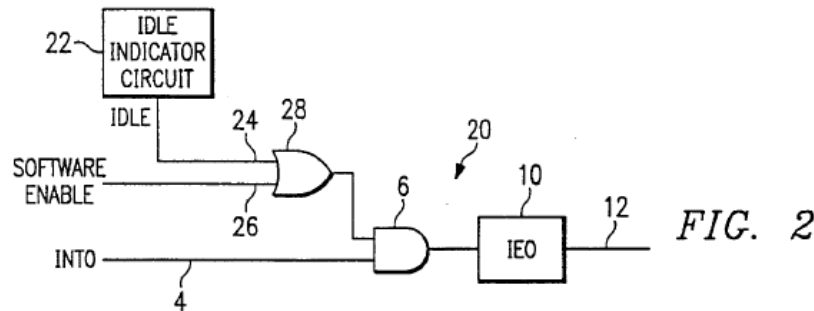

Referring to Figure 2, the '597 patent teaches that when idle indicator circuit 22 asserts an idle signal on line 24, the output of OR gate 28 is “high regardless of the state of the SOFTWARE ENABLE signal on line 26.” Ex. 1001, 5:61–65. The '597 patent further teaches that “[a]s long as the OR gate output 28 remains at a high level, the assertion of the interrupt request signal INTO on line 4 will set latch 10, thus generating the interrupt.” Ex. 1001, 5:65–6:1.

Based on this disclosure, the '597 patent teaches that a high output of gate 28, which the parties agree is a “mask signal,” would not mask the interrupt request, and a low output of gate 28 would not generate an interrupt through AND gate 6, thus masking the interrupt. In other words, the '597 patent teaches that the output of gate 28 is a mask signal that is disabled/off when output of the gate 28 is high, and active/on when the output of OR gate 28 is low. With this relationship in mind, we do not agree with Patent Owner that it would be “impossible” that “the interrupt signal and the interrupt request signal are both on when the mask gate is off.” See Tr. 41:22–25. As discussed, the output of OR gate 28 is high when masking is disabled/off, thus, “[a]s long as the OR gate output 28 remains at a high

level, the assertion of the interrupt request signal INTO on line 4 will set latch 10, thus generating the interrupt.” Ex. 1001, 5:65–6:1.

Accordingly, we are not persuaded that “first logic circuitry” and “second logic circuitry” excludes an AND gate alone and OR gate alone respectively as Patent Owner proposes.

B. Claims 6–9 – Obviousness over Tokiwa (Ex. 1002) and Smith (Ex.1004)

Petitioner argues that claims 6–9 are unpatentable under 35 U.S.C. § 103(a) over Tokiwa and Smith. Pet. 9–20. As explained in further detail below, we have considered the arguments and evidence presented, and we are persuaded that Petitioner has shown, by a preponderance of the evidence, that claims 6–9 are unpatentable over Tokiwa and Smith.

1. Relevant Legal Principles

A claim is unpatentable under 35 U.S.C. § 103(a) if the differences between the claimed subject matter and the prior art are such that the subject matter, as a whole, would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. *KSR Int’l Co. v. Teleflex Inc.*, 550 U.S. 398, 406 (2007). The question of obviousness is resolved on the basis of underlying factual determinations including (1) the scope and content of the prior art; (2) any differences between the claimed subject matter and the prior art; (3) the level of skill in the art; and, (4) where in evidence, so-called secondary considerations, including commercial success, long-felt but unsolved needs, failure of others, and unexpected results. *Graham v. John Deere Co.*, 383 U.S. 1, 17–18 (1966) (“the *Graham* factors”). The level of ordinary skill in the art usually is evidenced by the references themselves. *See Okajima v. Bourdeau*, 261 F.3d 1350, 1355 (Fed. Cir. 2001); *In re GPAC*

Inc., 57 F.3d 1573, 1579 (Fed. Cir. 1995); *In re Oelrich*, 579 F.2d 86, 91 (CCPA 1978).

For an obviousness analysis, prior art references must be “considered together with the knowledge of one of ordinary skill in the pertinent art.” *In re Paulsen*, 30 F.3d 1475, 1480 (Fed. Cir. 1994) (quoting *In re Samour*, 571 F.2d 559, 562 (CCPA 1978)). Moreover, “it is proper to take into account not only specific teachings of the reference but also the inferences which one skilled in the art would reasonably be expected to draw therefrom.” *In re Preda*, 401 F.2d 825, 826 (CCPA 1968). That is because an obviousness analysis “need not seek out precise teachings directed to the specific subject matter of the challenged claim, for a court can take account of the inferences and creative steps that a person of ordinary skill in the art would employ.” *KSR*, 550 U.S. at 418; *see also In re Translogic Tech., Inc.*, 504 F.3d at 1259.

2. *Summary of Tokiwa (Ex. 1002)*

Tokiwa teaches a virtual machine system with a virtual machine control program (VMCP) that manages machine resources shared among virtual machines (VM). VMCP operates in a privileged mode and the operating system (OS) under the VM operates in a non-privileged status or privileged status. Ex. 1002, 2. “Direct execution of privileged commands and interrupts on the VM means that privileged commands or interrupts belonging to the VM are executed in nearly the same execution time as in the actual machine, primarily by hardware.” *Id.* at 3.

Tokiwa also discloses an interrupt processing mechanism to prevent a VM in standby uninterruptible state rendering the actual machine itself uninterruptible. Ex. 1002, 4. Figure 1, reproduced below, is a logic circuit

diagram illustrating an interval timer interrupt processing mechanism for this purpose.

FIG. 1

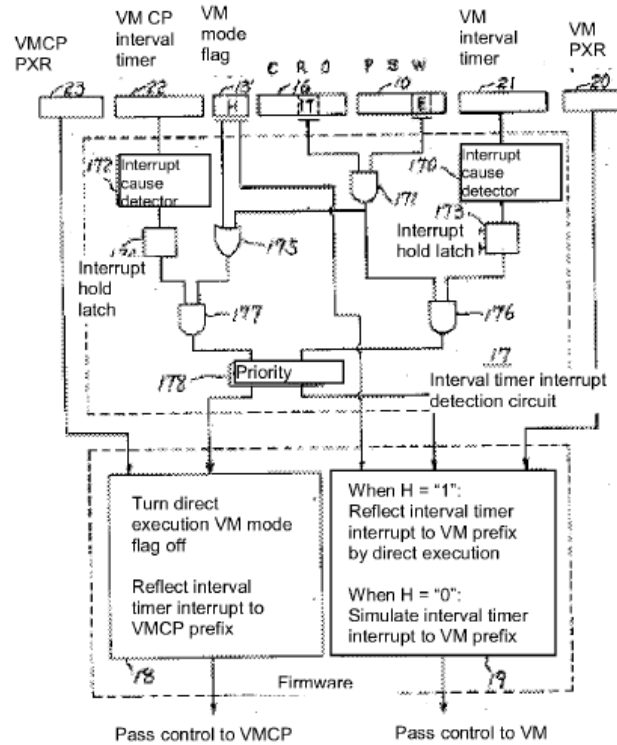


Figure 1 shows that the interval timer interrupt processing mechanism may include VM mode flag 13'. VM mode flag 13' has a value of "1" when in VM mode and a value of "0" when in hypervisor (HPV) mode. Ex. 1002, 3. In VM mode, privileged commands can be executed by the VM. *Id.* Figure 1 also shows interval timer interrupt detection circuit 17 that includes interrupt cause detection circuit 170 for VM interval timer 21, interrupt cause detection circuit 172 for VMCP interval timer 22, AND gates 171, 176, and 177, and OR gate 175 for processing the output of these interrupt cause detection circuits according to the contents of the external interrupt

mask (E) of PSW 10, and the interval timer interrupt submask (IT) of CRO 16. *Id.* at 4.

Referring to Figure 1, Tokiwa describes the operation of the interrupt processing mechanism where an interrupt is generated by VMCP interval timer 22 while the direct execution mode of VM is running. In particular, Tokiwa states

In this case, “1” is output from the interrupt cause detection circuit 172. Since the direct execution VM mode flag 13’ is “1,” the output of the OR circuit 175 is “1,” and as a result, the output of the AND circuit 177 is “1,” and the VMCP interrupt processing firmware 18 is started up. The firmware 18 sets the value of the direct execution VM mode flag 13’ to “0,” and reflects the interval timer interrupt to the VMCP prefix indicated by the VMCP prefix register 23. That is, in this case, *when an interrupt cause is generated by the VMCP interval timer, the VMCP always performs interrupt, regardless of the contents of the interrupt masks (E and IT) (in this case these are used for the running VM).*

Ex. 1002, 4–5 (emphasis added). Tokiwa further discloses a second example where an interrupt is generated by VMCP interval timer 22 while the VM is not in direct execution mode. In the second example, VM mode flag 13’ is “0” from the start. *Id.* at 5. In this mode, the interrupt is possible only when both the E (external interrupt mask) bit of the PSW 10 and the IT (interval timer interrupt submask) bit of CRO 16 are ‘1,’ and the output of AND circuit 171 is ‘1.’ *Id.* This results in an output of “1” from OR circuit 175 and an output of “1” from AND circuit 177. *Id.*

3. Summary of Smith (Ex. 1004)

Smith discloses a processor capable of reducing its power consumption by executing a WAIT or STOP instruction. In either the WAIT or STOP state, the processor again is rendered operational or restarted by an

15

Referring back to Figure 4, Smith indicates that in WAIT mode, the presence of an INT signal and in the absence of a MASK1 signal will result in a logical “0” applied to the D input of flip-flop 148. Ex. 1004, 7:29–32. This, in turn, will result in a logical “1” applied to the reset input of WAIT flip-flop 98, which enables clock signals C1 and C2 and address and data strobe signals AS and DS. *Id.* at 7:43–48. If an interrupt signal should occur after executing a STOP instruction, then flip-flop 148 must be reset asynchronously because master clock oscillator 114 has been disabled. Ex. 1004, 8:48–53. Smith adds that resetting flip-flop 148

is accomplished as follows, a logical “1” on the interrupt input is applied to a first input of NAND gate 180. Since clock signal C2 is at a logical “0”, a logical “1” is applied to a second input of NAND gate 180 via inverter 182. Finally, a third input of NAND gate 182 is coupled to the output of STOP flip-flop 100 which, after execution of the STOP instruction, is at a logical “1” level. Therefore, the output of NAND gate 180 is at a logical “0” level. This output is inverted by inverter 184 and applied to the R input of flip-flop 148.

Id. at 8:53–63.

4. Analysis

We have reviewed the Petition, the Patent Owner’s Response, and Petitioner’s Reply, as well as the evidence discussed in each of those papers, and are persuaded, by a preponderance of the evidence, that claims 6–9 would have been obvious based on Tokiwa and Smith. Below we discuss claim 6, which is illustrative of claims 7–9.

Our discussion of claim 6 includes the limitations recited in cancelled claims 1, 4, and 5, which are required in dependent claim 6.

Cancelled claim 1 is directed to an interrupt mask disable circuit with
first logic circuitry operably coupled to receive an interrupt request and a mask signal and to provide an interrupt signal when the interrupt request is active and the mask signal is disabled, and to provide a non-interrupt signal when the mask signal is enabled regardless of whether the interrupt request is active or inactive.

Petitioner asserts that Tokiwa's disclosure of the interval timer interrupt processing mechanism, depicted in Figure 1's logic diagram, satisfies this limitation. Pet. 13–14. Petitioner argues that Tokiwa provides an example where an interrupt cause is generated by the VMCP interval timer while the VM is not running in direct execution mode. *Id.* In that mode, "interrupt is possible only when both the E (external interrupt mask) bit of the PSW 10 and the IT (interval timer interrupt submask) bit of the CRO 16 are '1.'" *Id.* (citing Ex. 1002, 5).

Cancelled claim 1 further requires a

second logic circuitry operably coupled to receive a mask activation signal and a mask override signal and to produce the mask signal, wherein the mask signal is enabled when the mask activation signal is active and the mask override signal is not enabled and wherein the mask signal is disabled when the mask override signal is active regardless of whether the mask activation signal is enabled or disabled.

Referring, again, to Figure 1, Petitioner asserts that Tokiwa discloses a second example where an interrupt is generated by VMCP interval timer 22 while VM is in direct execution mode (i.e., VM mode flag 13' is "1"). Pet. 14–15. Petitioner argues that in this mode, "the VMCP interval timer . . . always performs the interrupt, regardless of the contents of the interrupt masks (E and IT)." *Id.* (quoting Ex. 1002, 5). Essentially, Petitioner asserts that VM mode flag 13' set to "1" discloses an override signal. Pet. 14.


In response, Patent Owner argues that the Petition identifies the same circuit elements shown in Figure 1 of Tokiwa for the “first logic circuitry” and “second logic circuitry,” and the Decision to Institute relies on different states of the same circuit. PO Resp. 15. According to Patent Owner, the first and second logic circuitry must “be specific, separate components, particularly as the second logic circuitry provides the mask signal received by the first logic circuitry.” *Id.*

We do not agree with Patent Owner that the “first logic circuitry” and “second logic circuitry” must be separate components. The literal language of claim 1 does not expressly require separate components. Nonetheless, even assuming these limitations require separate components, the Petition relies on the disclosure of Tokiwa’s interval timer interrupt mechanism (Ex. 1002, Fig. 1), which includes separate components *AND gate 177* and *OR gate 175*, for the “first logic circuitry” and the “second logic circuitry” respectively. Pet. 13–14; Pet. Reply 5–9. Furthermore, as discussed above, we determined that the scope of the claim term “first logic circuitry” can be met by a single AND gate and, similarly, the claim term “second logic circuitry” can be met by a single OR gate. *See supra* Claim Construction.

Patent Owner further argues that Tokiwa’s AND gate 177 does not teach a “first logic circuitry” because AND gate 177 does not “provide a non-interrupt signal when the mask signal is enabled regardless of whether the interrupt request is active or inactive.” PO Resp. 16–17. Patent Owner relies on a set of truth tables for its position. *Id.*

In its Reply, Petitioner contends that Patent Owner’s truth tables are incorrect and do not take into account that Tokiwa teaches “Bits E and IT control the output of AND gate 171, and gate 171 has a high voltage when interrupts are allowed (i.e., not masked).” Pet. Reply 6–7 (citing Ex. 1002,

FIG. 1

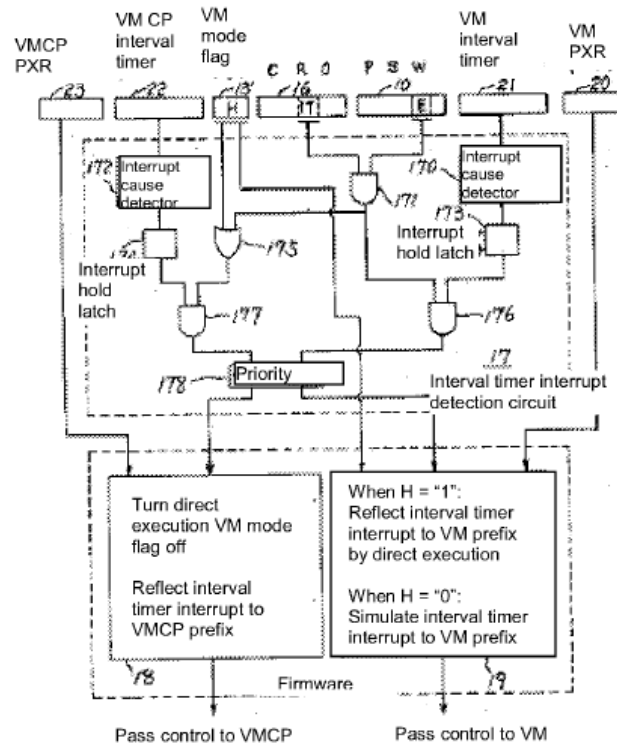

19

Looking again to Figure 1 of Tokiwa, we note that the output of AND gate 171 is fed into OR gate 175 along with an input from VM mode flag 13. Furthermore, Figure 1 shows that when AND gate 171 outputs a “0” (i.e., enabled “mask activation signal”) and VM mode flag 13’ is set to “0” (i.e., HPV mode), the output of OR gate 175 will also be low or “0.” *See Ex. 1002, Fig. 1.* In that circumstance, Petitioner argues that a low output from OR gate 175 teaches a “mask signal” that is enabled. Pet. Reply 8 (“OR gate 175 is a mask signal which is set when gate 175 is ‘0’ and not set when it is ‘1.’”)

Petitioner further asserts that the output of OR gate 175 (i.e., mask signal) is input into AND gate 177, which Petitioner argues teaches a “first logic circuitry.” Pet. Reply 8. Petitioner contends that AND gate 177 outputs an interrupt signal only if the interrupt request signal (*see, e.g.*, Interrupt Hold Latch 174) and the mask signal is off or disabled. *Id.* at 9. However, if the mask signal is enabled (i.e., OR gate 175 output is “0”), “any interrupt requests are masked/blocked.” *See id.*

Based on the complete record before us, Petitioner’s arguments are persuasive. We agree with Petitioner that Tokiwa teaches that when the output of OR gate 175 is low and the “mask signal” is enabled, interrupt requests are masked regardless of whether there is an active or inactive interrupt request. Thus, we are persuaded that Tokiwa teaches a “first logic circuitry” as recited in claim 1 and required in claim 6.

Next, Patent Owner argues that Tokiwa does not disclose a second logic circuitry that enables the mask signal “when the mask activation signal is active and the mask override signal is not enabled,” and disables the mask signal, “when the mask override signal is active regardless of whether the mask activation signal is enabled or disabled.” PO Resp. 17–18. Patent

Owner adds that even if VM Mode Flag 13' is viewed as the mask override signal, OR gate 175 does not teach a "second logic circuitry" because the mask signal is not disabled when the mask override signal is enabled regardless of whether the mask activation signal is enabled or disabled. *Id.* at 18–19.

Based on the complete record before us, we determine Petitioner's arguments are persuasive. First, we are persuaded by Petitioner's arguments that Tokiwa teaches, "wherein the mask signal is disabled when the mask override signal is active regardless of whether the mask activation signal is enabled or disabled." Specifically, Tokiwa teaches that when the VM Mode Flag is set to "1," "the VMCP interval timer . . . always performs the interrupt, regardless of the contents of the interrupt masks (E and IT). Ex. 1002, 5. As discussed above, Petitioner relies on this direct execution mode of VM Mode Flag 13' set to "1" to teach an enabled "mask override signal." Pet. 14; Pet. Reply 6–7; *see* PO Resp. 18–19. According to Petitioner, an output of "1" from VM Mode Flag 13' teaches an active or enabled "mask override signal" that is input into OR gate 175. Pet. 14; Pet. Reply 6–7. Petitioner further argues that the output of gate 171 teaches a "mask activation signal" that is active/enabled when "0" and disabled when set to "1." Pet. Reply 6–7. The output of gate 171 (i.e., mask activation signal) is also an input into OR gate 175. *Id.* Given the nature of OR gate 175, when the input from VM Mode Flag 13 is "1," the OR gate 175 will output a "1" regardless of the status of the signal from gate 171 (e.g., active or disabled mask activation signal). Further, as discussed above, Petitioner argues that the output of OR gate 175 represents the "mask signal," which is disabled when set to "1." Pet. Reply 8. Thus, when VM Mode Flag 13' is set to "1" and the "mask override signal" is active, the output of OR gate 175 (i.e.,

mask signal) will also be set to “1” or disabled regardless of whether the output from gate 171 (i.e., mask activation signal) is “1” or “0.” *Id.* at 6–8.

Second, we are persuaded by Petitioner’s arguments that Tokiwa teaches “wherein the mask signal is enabled when the mask activation signal is active and the mask override signal is not enabled.” Tokiwa discloses a HPV mode for VM Mode Flag at “0” where the VM is not running in direct execution mode and “interrupt is possible only when both the E (external interrupt mask) bit of the PSW 10 and the IT (interval timer interrupt submask) bit of the CRO 16 are ‘1.’” Pet. 13–14 (citing Ex. 1002, 5). As discussed above, Petitioner argues that the output of gate 171 teaches a mask activation signal that is active when the signal is low or “0.” Pet. Reply 6–7. When both VM Mode Flag 13’ and the output of gate 171 input “0” into OR gate 175, the output of OR gate 175 will be “0.” Thus, Petitioner argues that the output of OR gate 175 of “0” teaches an enabled mask signal when the mask activation signal (output of gate 175 is “0”), is active and the mask override signal (output of VM Mode Flag 13 is “0”) is not enabled. *Id.* at 8. We find Petitioner’s arguments persuasive.

Claim 6 also depends from cancelled claims 4 and 5. Claim 4 depends from claim 1 and recites that the “mask override signal is enabled based on a hardware condition.” Cancelled claim 5 depends from claim 4 and requires that the interrupt mask disable circuit is incorporated within a processor and “the hardware condition occurs when said processor is in a particular state.”

For these limitations, Petitioner relies on the VM mode and HPV mode for the required hardware condition and processor state. Pet. 15–17. Additionally, Petitioner points to Tokiwa’s description of a virtual machine system having a VMCP that manages resources (central processing units,

main memory devices, progress status words (PSWs), control registers, and input/output devices). *Id.* at 17.

Additionally, with respect to all of Patent Owner's arguments directed to Tokiwa, Petitioner contends that collateral estoppel applies as these arguments were not made in response to the office actions in Ex Parte Reexamination No. 90/012781. Pet. Reply 4–5. In the interest of judicial efficiency, we need not address this issue because in considering Patent Owner's arguments, we are persuaded that Petitioner has established a preponderance of evidence that claim 6 would have been obvious over Tokiwa and Smith.

Claim 6 depends from claim 5 and further requires the “particular state comprises an idle mode.” For the “idle mode,” Petitioner points to Smith's disclosure of an apparatus for inhibiting clock signals in response to a WAIT or STOP instruction. Pet. 17–19. At the oral hearing, Patent Owner disputed whether Smith can disclose using an idle mode as a mask override signal when Smith does not disclose a mask override signal. Tr. 56:6–18, 57:1–5.

Based on the complete record, we determine that Petitioner's arguments are persuasive. Petitioner asserts Smith teaches a “mask override signal” because Smith discloses the ability to wake from a STOP mode when an interrupt is received, regardless of the mask signal. Referring to Figure 4, Petitioner asserts that the STOP mode, indicated by a logical “1” on the STOP output of flip-flop 100, is fed into the reset path of interrupt flip-flop 148 via NAND gate 180 and inverter 184. Pet. 21–22. The INT signal (at “1” when indicating an interrupt) and inverted C2 clock signal (“0” in STOP mode) are also inputs to NAND gate 180. *Id.* at 22. Based on these inputs, Petitioner adds that flip-flop 148 will be reset to logical “0,”

regardless of the MASK1 signal. *Id.* Thus, Petitioner argues that Smith discloses an override that allows an interrupt to cause the processor to operate out of a low-power state, even if the interrupt is masked. *Id.* at 9–10. Petitioner also argues that “[a] person of ordinary skill in the art would have known that combining Smith’s ‘idle mode’ circuitry within Tokiwa’s interrupt mask disable circuitry would yield predictable, expected and beneficial results” of keeping a mask signal from preventing the processor from waking from an interrupt when in a low power state. *Id.* at 10.

We are persuaded that Petitioner has established by a preponderance of the evidence that claim 6 would have been obvious over Tokiwa and Smith. Further, Petitioner provides detailed explanations of how each limitation of claims 7–9 is taught or suggested by the combination of Tokiwa and Smith. Pet. 19–20. For example, Petitioner asserts that Tokiwa’s OR gate 175 discloses “wherein the second logic circuitry comprises an OR gate” for claim 8. Accordingly, we are persuaded that Petitioner has established by a preponderance of the evidence that claims 7–9 would have been obvious over Tokiwa and Smith.

C. Claims 6–9 – Obviousness Over Katayose and Smith

Petitioner argues that claims 6–9 are unpatentable under 35 U.S.C. § 103 over Katayose and Smith. Pet. 7, 48–60. As explained in further detail below, we have considered the arguments and evidence presented, and concludes that Petitioner has established by a preponderance of the evidence that claims 6–9 would have been obvious over Katayose and Smith.

1. Summary of Katayose (Ex. 1003)

Katayose discloses a data processor with two different interrupt processing modes. Ex. 1003, 1:7–10. Katayose calls the first mode a “vector interrupt” mode and the second mode a “macroservice” mode. *Id.* at

3:6–7, 17–28. In the vector interrupt mode, vectors are assigned to peripheral devices and an interrupt circuit to specify a “head address of respective interrupt routines held in a program memory.” *Id.* at 1:59–60. This allows selection of a program appropriate to the interrupt request from a plurality of interrupt processing programs. *Id.* at 1:52–60. In the macroservice mode, “if the interrupt request is generated, the execution of the current program is interrupted and an ordinary program execution operation of the CPU is stopped.” *Id.* at 3:18–22.

Referring to Figure 1, Katayose describes interrupt controller 100, which includes interrupt request flag 102 and mode designation (MS/INT) Flag 104. Ex. 1003, 4:19–22. When a processing request is generated from a peripheral device and interrupt request flag 102 is set, controller 100 makes the INTRQ signal active and reads the content of the mode designation flag 104 to make the MS/INT signal active or inactive. *Id.* at 4:52–57. When the MS/INT signal is low, execution unit 200 executes the vector interrupt. *Id.* at 4:63–65. When the MS/INT signal is high, interrupt processing occurs through macroservice mode. *Id.* at 5:11–13.

Figure 6, reproduced below, shows a logic circuit diagram for an interrupt controller. Ex. 1003, 3:65–66.

FIGURE 6

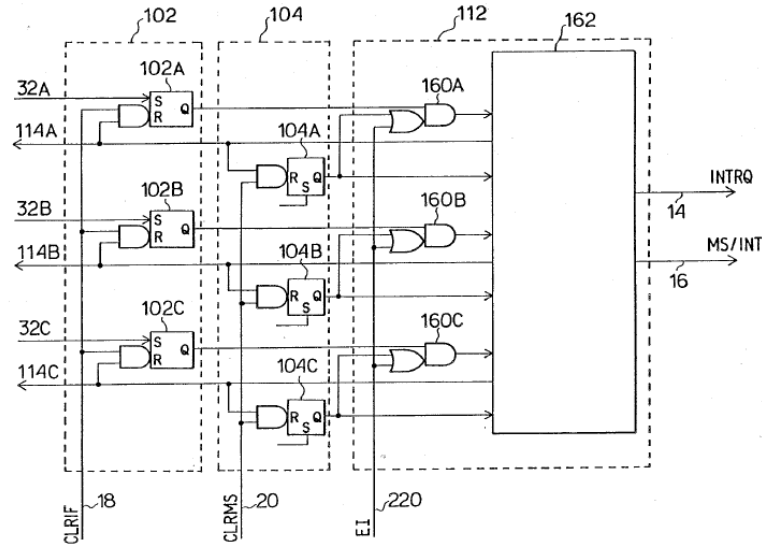


Figure 6's logic circuit diagram includes interrupt flag 102, mode designation flag 104, and interrupt processing circuit 112. Additionally, Figure 6 includes logic gates 160A, B, and C, which respectively receive interrupt request flags 102A, B, and C; mode designation flags 104A, B, and C; and an EI flag signal. Ex. 1003, 14:16–21. The EI flag signal is an interrupt enable flag that is set when an interrupt processing is allowed and is reset when an interrupt processing is already being executed or when an interrupt should be inhibited. *Id.* at 2:6–9.

When mode selection flag 104 is set (i.e., macroservice mode) and interrupt request flag 102A is set, AND-OR logic 160A generates a high level output regardless of the EI flag signal. Ex. 1003, 14:33–36. The execution unit detects that the INTRQ signal is set to high and the MS/INT signal is set to high, and executes macroservice. *Id.* at 14:50–52. In vector interrupt mode, mode designation flag 104 is reset and the MS/INT signal is low. If EI flag signal 220 is at a high level, the output of AND-OR gate 160A is high. *Id.* at 14:63–68. If EI flag signal 220 is low, the output of

AND-OR logic 160A is brought to a low level and the AND-OR gate maintains its output at a low level regardless of the content of the corresponding interrupt request flag. *Id.* at 15:13–17.

2. Analysis

Below we discuss claim 6, which is illustrative of claims 7–9. Again, our discussion of claim 6 includes the limitations recited in cancelled claims 1, 4, and 5, which are required in dependent claim 6.

Cancelled claim 1 recites an interrupt mask disable circuit with

first logic circuitry operably coupled to receive an interrupt request and a mask signal and to provide an interrupt signal when the interrupt request is active and the mask signal is disabled, and to provide a non-interrupt signal when the mask signal is enabled regardless of whether the interrupt request is active or inactive.

To meet this limitation, Petitioner asserts that Katayose discloses AND gates 160A, 160B, and 160C, which receive signals respectively from interrupt request flags 102A, 102B, and 102C and OR gates. Pet. 48; *see also id.* at 52–53 (claim chart). Petitioner adds that one of the signals from the OR gates is EI flag, which allows activation of a mask signal. *Id.* We are persuaded by Petitioner’s arguments.

Cancelled claim 1 further requires a

second logic circuitry operably coupled to receive a mask activation signal and a mask override signal and to produce the mask signal, wherein the mask signal is enabled when the mask activation signal is active and the mask override signal is not enabled and wherein the mask signal is disabled when the mask override signal is active regardless of whether the mask activation signal is enabled or disabled.

Petitioner asserts that Katayose’s mode selection flag 104 provides a mask override signal. Pet. 48; *see also id.* at 53–54 (claim chart). “When high,

the mode selection flag 104 signal causes the output of the OR gate to be high, which will cause the interrupt to fire even if the EI flag is set to low (i.e., the interrupt is masked).” Pet. 48. We are persuaded by Petitioner’s argument.

In response, Patent Owner first argues that the Petition identified one of circuit elements 102, 104, or 160 shown in Figure 6 of Katayose as the alleged first logic circuitry and second logic circuitry, whereas the Board’s institution decision identifies AND gates 160 as the alleged first logic circuitry and mode selection flag 104 as the alleged second logic circuitry. PO Resp. 19–21. For clarity of the record, Patent Owner’s characterization of the Decision to Institute is incorrect. The Decision to Institute the instant *inter partes* review was based on the evidence and arguments presented in the Petition. Dec. 2. The Decision to Institute generally refers to the evidence and arguments presented in the Petition (including elements 104 and 160 of Katayose), and does not depart from Petitioner’s arguments presented in the Petition on this point. Dec. 16–17 (citing Pet. 48, 52–54).

Next, Patent Owner argues that Katayose does not teach a first logic circuitry “to provide an interrupt signal when the interrupt request is active and the mask signal is disabled, and to provide a non-interrupt signal when the mask signal is enabled regardless of whether the interrupt request is active or inactive.” PO Resp. 20–21. Patent Owner further relies on a set of truth tables to argue that the circuit shown in Figure 6 of Tokiwa does not disclose the recited logical relationship. *Id.* Patent Owner also argues that Petitioner has not identified elements disclosed in Katayose that correspond to the second logic circuitry. *Id.* at 23.

Petitioner argues that the circuit shown in Figure 6 includes three AND-OR logics 160A/B/C which respectively receive the interrupt request

flags 102A/B/C, and the mode designation flags 104A/B/C, and which also commonly receive the EI flag signal. Pet. 52 (citing Ex. 1003, 14:10–26). Petitioner further argues that the EI flag signal represents a mask activation signal. Pet. 48; Pet. Reply 10. Petitioner adds that “[w]hen activated, the mask signal causes EI flag to generate a low level output, and the interrupt will not be activated because the signal from the OR gate into AND gate 160A, for example, would be low.” *Id.* Petitioner asserts that the mask override signal is represented by flip-flop 104A/B/C. *Id.* (citing Ex. 1003, 1:65–2:9, 14:30–36). Petitioner further asserts that EI flag 220 and mode selection flag 104 signals are inputs of the OR gates of 160A/B/C, whose outputs represent the mask signal as an input to the AND gates of 160A/B/C. Pet. 48; Pet. Reply 10. Petitioner also argues the interrupt request is represented by flip-flop 102A/B/C, and it is also an input to the AND gates. *Id.*

Based on the complete record, Petitioner’s arguments are persuasive. Looking at the gates of 160A, the AND gate receives a processing request from interrupt flag 102A when interrupt flag 102A is set. Ex. 1003, 4:52–57. The AND gate also receives the input from interrupt flag 102A and the output from the OR gate of 160A. *Id.* at Fig. 6. When interrupt flag 102A is set (i.e., interrupt request signal set) and the output of OR gate 160A is high (i.e., mask signal disabled), the output of the AND will be high, allowing interrupts. *Id.* at 14:27–49, 6:26–40, Fig. 6. However, when the output of the OR gate is low (i.e., mask signal is enabled), the output of the AND gate will also be low regardless of whether the interrupt request from interrupt flag is set or not. *Id.* at Fig. 6.

Additionally, OR gate of 160A receives inputs from EI flag 220 and mode selection flag 104. Petitioner argues that EI flag 220 provides a mask

activation signal and mode selection flag 104 provides a mask override signal. Pet. 48; Pet. Reply 10. Katayose teaches that when the mode selection flag 104 is set, the system processes interrupts in “macroservice mode.” Ex. 1003, 4:52–57, 5:11–13. Thus, in this circumstance, OR gate of 160A will have a high output, disabled mask signal, regardless of the input from EI flag 220. The output of the OR gate will be low (i.e., mask signal enabled) when the signals from EI flag 220 and mode selection flag 104 are both low.

Cancelled claim 4 depends from claim 1 and recites that the “mask override signal is enabled based on a hardware condition.” Cancelled claim 5 depends from claim 4 and requires that the interrupt mask disable circuit is incorporated within a processor and “the hardware condition occurs when said processor is in a particular state.”

For these limitations, Petitioner asserts that Katayose discloses controller 100, which includes interrupt request flag 102 and mode designation flag 104. Pet. 55–56. Petitioner adds that Katayose describes a “third case” where the mode designation flag 104 is set for the macroservice mode and both the INTRQ and MS/INT signal are rendered active to a high level regardless of the content of EI flag 218. *Id.* at 54. We understand Petitioner’s position to be that the macroservice mode meets the limitations of a hardware condition and processor state recited in cancelled claims 4 and 5. We are persuaded by Petitioner’s arguments.

Claim 6 depends from claim 5 and further requires the “particular state comprises an idle mode.” For the “idle mode,” Petitioner points to Smith’s disclosure of an apparatus for inhibiting clock signals in response to a WAIT or STOP instruction. Pet. 58. Petitioner further asserts that Smith discloses receiving an INT signal after executing a STOP instruction,

whereby flip-flop 148 is reset regardless of the state of the MASK1 signal. *Id.* at 22, 58–59. Petitioner asserts several reasons why one of ordinary skill in the art would have combined the alleged teachings in Katayose and Smith. *Id.* at 50–51. These reasons include that combining the different interrupt modes described in Katayose with the idle mode disclosed in Smith would reduce power consumption and “provide an apparatus for disabling clock signals in an intelligent manner until further processor operations become necessary.” *Id.* at 50 (citing Ex. 1004, 2:2–15).

Accordingly, we are persuaded that Petitioner has established by a preponderance of the evidence that claim 6 would have been obvious over Katayose and Smith. Further, Petitioner provides detailed explanations of how each limitation of claims 7–9 is taught or suggested by the combination of Katayose and Smith, which we find persuasive. Pet. 59–60. Thus, we are persuaded that Petitioner also has demonstrated by a preponderance of the evidence that claims 7–9 would have been obvious over Katayose and Smith.

D. Claims 6 and 7 – Anticipation by Smith (Ex. 1004)

Petitioner argues that claims 6 and 7 are unpatentable under 35 U.S.C. § 102(b) over Smith. Pet. 20–29. Below, we discuss claim 6, which is illustrative of claims 7–9.

Based on the complete record, we agree with Patent Owner and Petitioner that it is not clear from the Petition which elements in Smith are relied upon by the Petitioner for this challenge. PO Resp. 8–13; Tr. 44:17–20, 45:10–22 (Petitioner states “we do recognize . . . that there are some concerns with the 15 specific teachings of Smith, whether it anticipates”). For example, referring to Figure 4 of Smith, Petitioner argues that Smith teaches an “INT (interrupt) signal and a MASK1 signal are inputs to NAND

gate 154, the output of which feeds to the D input of the interrupt flip-flop 148.” Pet. 21. The Petition further notes that “mask interrupt signal (MASK[1]) is applied to inverter 156 the output of which is coupled to a second input of NAND gate 154.” Pet. 24. Petitioner also argues that Smith discloses overriding the mask signal via the output of STOP flip-flop 100.

Id. at 21. Petitioner asserts

The STOP mode is indicated by a logical “1” on the STOP output of flip-flop 100, which is fed into the reset path of the interrupt flip-flop 148. The inputs to NAND gate 180, which controls the reset of the interrupt flip-flop 148) are the STOP signal, the INT signal, and an inverted version of clock signal C2 (which Smith describes as always “0” while in STOP mode). Accordingly, when the device is in STOP mode (the STOP signal is “1”) and an interrupt is received (the INT signal is “1”), the interrupt flip-flop 148 will be reset to logical “0”, indicating an interrupt, regardless of the state of the MASK1 signal.

Id. at 21–22 (citing Ex. 1002, 8:48–65).

Based on this discussion in the Petition, it is unclear how Smith discloses a mask signal. For example, if Petitioner relies on the MASK1 signal to teach a mask signal, Petitioner has not demonstrated by a preponderance of the evidence that Smith teaches a second logic circuitry that produces the MASK1 signal. Furthermore, to the extent that the Petition argues that other components disclosed in Smith teach the mask signal, we decline to speculate on what aspects of Smith satisfy this limitation.

Accordingly, for claims 6–9, we determine that Petitioner has not shown, by a preponderance of the evidence, that these claims are anticipated by Smith.

III. MOTION TO EXCLUDE

A motion to exclude is required to preserve an objection to the admissibility of evidence. 37 C.F.R. § 42.64(c). Patent Owner seeks to exclude the following evidence: (1) Petitioner’s citations to the ’597 patent on the basis that these improperly advance claim construction positions (Mot. Excl. 1–3); (2) Exhibits 1012 (Ex Parte Reexamination Certificate for the ’597 patent) and 1013 (Notice of Intent to Issue *Ex Parte* Reexamination Certificate for the ’597 patent) on the basis that these are not relevant and constitute a new ground of unpatentability (*id.* at 4–6); and (3) Petitioner’s arguments presented on pages 5–15 of Petitioner’s Reply directed to truth tables and “complementary relationships” on the basis these arguments are speculative and not supported by evidence in the record (*id.* at 6–15).

A motion to exclude is neither a substantive sur-reply, nor a proper vehicle for arguing whether a reply or supporting evidence is of appropriate scope. *Zynga Inc. v. Personalized Media Commc’ns, LLC*, IPR2013-00162, slip op. at 3 (PTAB Aug. 28, 2013) (Paper 16); *Berk-Tek LLC v. Belden Tech., Inc.*, IPR2013-00057, slip op. at 3 (PTAB Oct. 31, 2013) (Paper 39).

In this case, the Patent Owner Response raised several substantive issues that were not raised in the Petition. These include the proper construction of the “first logic circuitry” and “second logic circuitry” (PO’s Resp. 14–16) and whether Tokiwa teaches these limitations (*id.* at 14–19), both of which we have discussed extensively.

Petitioner was entitled to rebut Patent Owner’s arguments concerning the construction of the first and second logic circuitry limitations. Pet. Reply 2–3. A petitioner’s reply to a patent owner response may address only issues raised in the corresponding opposition. Office Patent Trial Practice Guide, 77 Fed. Reg. 48,756, 48,767 (Aug. 14, 2012). Although the

Patent Owner contends there is no dispute regarding the claim terms “first logic circuitry” and “second logic circuitry,” Patent Owner attempts to directly address the substance of the dispute in its Motion to Exclude. More specifically, Patent Owner attempts to bolster its argument that the claim language “first logic circuitry” excludes an AND gate alone and “second logic circuitry” excludes an OR gate alone. Mot. Excl. 2; PO Resp. 14–16. This is an improper use of a motion to exclude, which does not afford for an opportunity for Patent Owner to present arguments that belong in a sur-reply. Additionally, we note that the parties were given an opportunity to clarify respective claim construction issues at the oral hearing. Tr. 37:18–42:1, 46:5–48:7.

Petitioner was also entitled to rebut Patent Owner’s arguments concerning the objective criteria of non-obviousness. Pet. Reply 5–13 (addressing the combination of Tokiwa and Smith and Katayose and Smith). Patent Owner presented several arguments based on truth tables that Patent Owner asserted represented the logical relationships disclosed in Tokiwa and Katayose. PO Resp. 16–24. In response to Patent Owner’s arguments based on its truth tables, Petitioner’s Reply contained alternative truth tables based on Petitioner’s reading of the references. Pet. Reply 7–13; Tr. 24:1–25:17. In challenging Patent Owner’s truth tables, Petitioner relies on a complementary relationship theory to support its own truth tables. Pet. Reply 7–13; Tr. 13:24–16:1. Patent Owner contends that this theory is not supported by any evidence in the record. Even assuming Patent Owner is correct, a motion to exclude addresses the admissibility of evidence, and not how much weight to give an argument.

Finally, we are not persuaded that Petitioner’s reliance on Exhibits 1012 and 1013 for a collateral estoppel theory constitutes a new ground of

unpatentability. Petitioner was entitled to rebut Patent Owner's non-obviousness arguments by relying on rebuttal evidence challenging arguments raised in the Patent Owner's Response. Moreover, we note that we considered all of Patent Owner's arguments concerning Tokiwa without determining whether collateral estoppel applies. Upon review of the complete record, we determine, as discussed above, that Petitioner has demonstrated by a preponderance of the evidence that Tokiwa and Smith render claims 6–9 of the '597 patent unpatentable. Thus, at the very least, Patent Owner's Motion to Exclude Exhibits 1012, and 1013 should be denied as moot.

In consideration of the above, we deny Patent Owner's Motion to Exclude in its entirety.

IV. CONCLUSION

Petitioner has shown, by a preponderance of the evidence, that claims 6–9 of the '597 patent are unpatentable.

IV. ORDER

In consideration of the foregoing, it is hereby:

ORDERED that claims 6–9 of the '597 patent have been shown, by a preponderance of the evidence, to be unpatentable over Tokiwa and Smith;

FURTHER ORDERED that claims 6–9 of the '597 patent have been shown, by a preponderance of the evidence, to be unpatentable over Katayose and Smith;

FURTHER ORDERED that claims 6–9 of the '597 patent have not been shown by a preponderance of the evidence to be unpatentable as anticipated by Smith;

FURTHER ORDERED that Patent Owner's Motion to Exclude is DENIED; and

IPR2014-00564
Patent 5,530,597

FURTHER ORDERED that because this is a final written decision of the Board under 35 U.S.C. § 318(a), parties to the proceeding seeking judicial review of the decision must comply with the notice and service requirements of 37 C.F.R. § 90.2.

PETITIONER:

Sean Hsu
shsu@hdbdlaw.com

PATENT OWNER:

Minghui Yang
myang@dpelaw.com

Greg Donahue
gdonahue@dpelaw.com